


RICOH
imagine. change.

B&W Multi Function Printer

RICOH
IM 2500
IM 3000
IM 3500
IM 4000
IM 5000
IM 6000

Copier Printer Facsimile Scanner

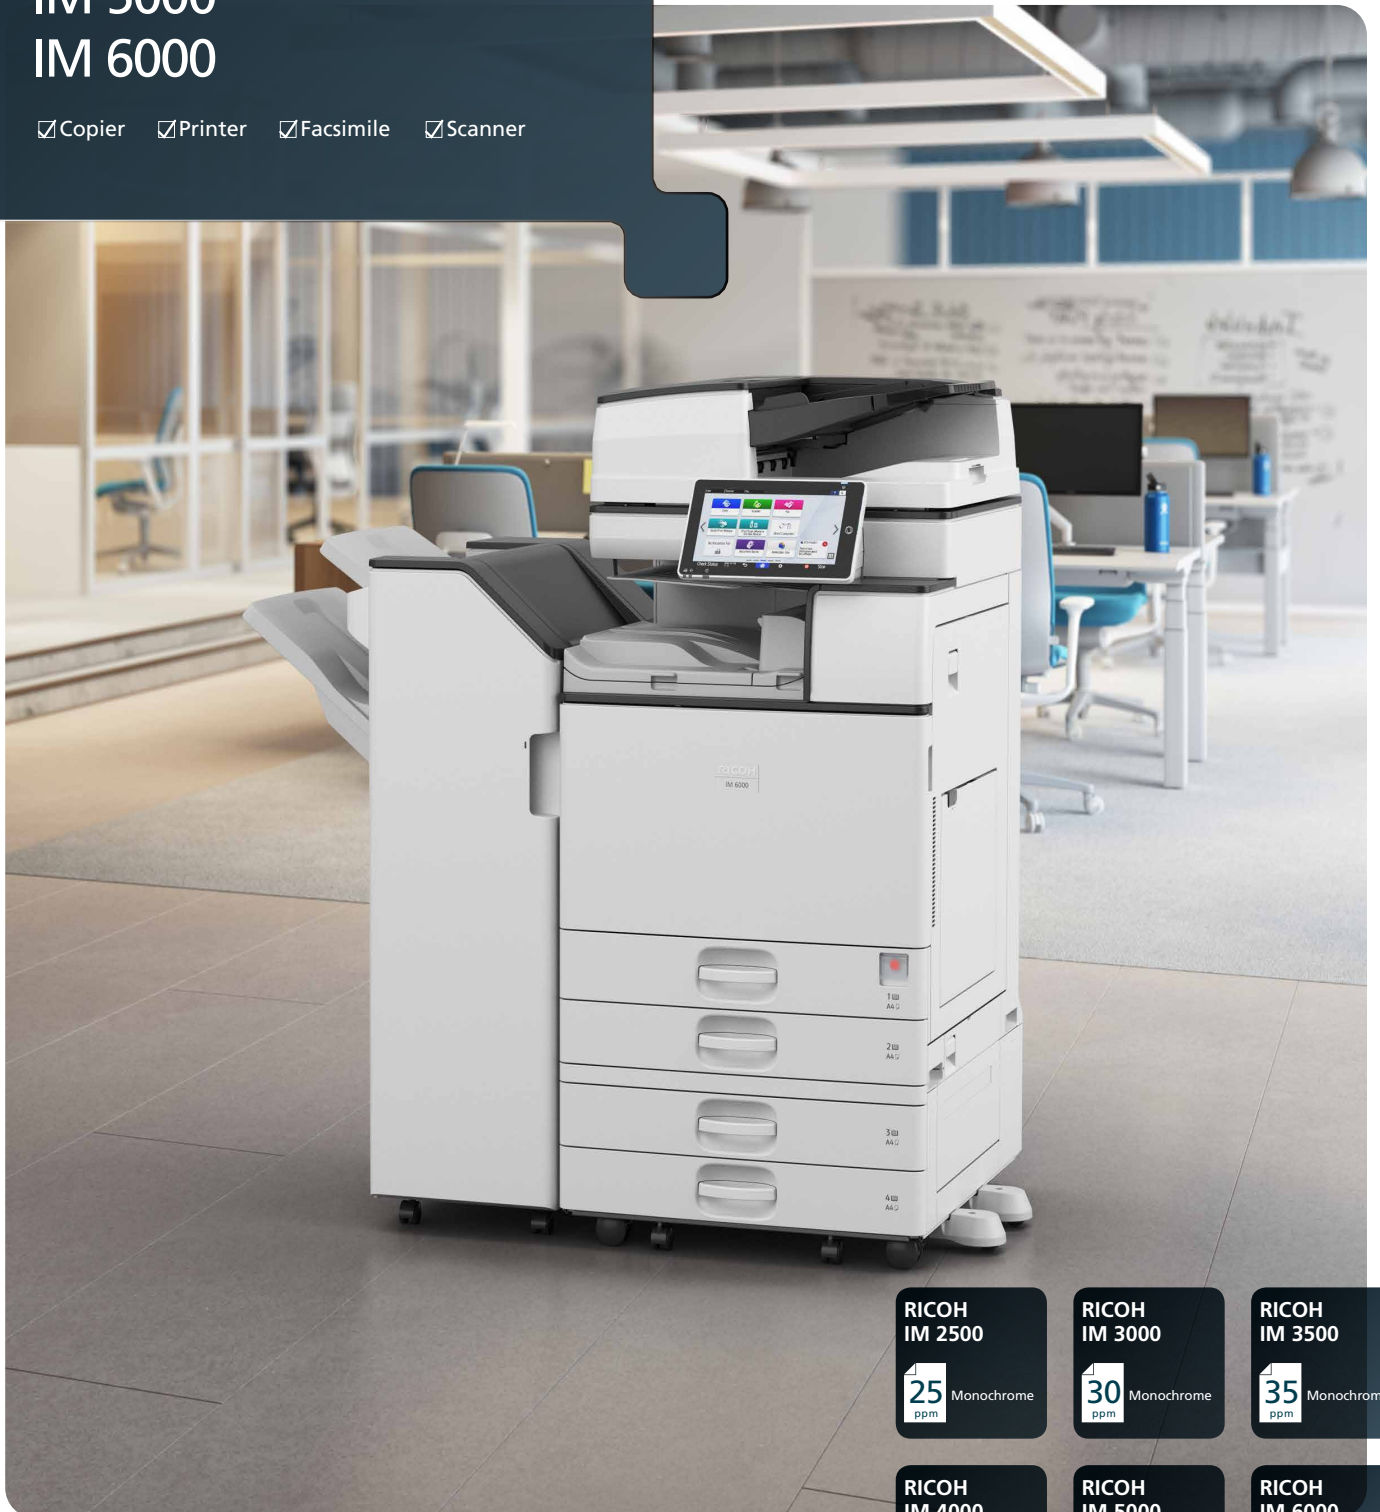

RICOH
IM 2500
25 Monochrome
ppm

RICOH
IM 3000
30 Monochrome
ppm

RICOH
IM 3500
35 Monochrome
ppm

RICOH
IM 4000
40 Monochrome
ppm

RICOH
IM 5000
50 Monochrome
ppm

RICOH
IM 6000
60 Monochrome
ppm

Convert to cloud

Manage your documents with ease and access professional printouts inhouse on demand



Digital document storage has never been easier

They say once you go digital, you'll never go back to the paper trail. At Ricoh, we've made it so easy to convert paper-based information to digital format for fast and convenient digital storage. Simply scan documents directly to cloud storage services such as Dropbox™ or SharePoint™ or to folders on your corporate network. We're adding on new "scan to" destinations all the time. And if you are concerned about security of your documents in the cloud, rest assured that our multi-layered security features make digital document management risk proof.

Bringing on new technologies? No problem

Ricoh's Always Current Technology allows you to add and connect to new software solutions, applications and cloud services as you bring them onboard to optimise your document management workflows. Now your people can work smarter, faster and more securely than ever knowing that upgrades can simply be downloaded and installed to any device they use so their tools are always current.



A suite of options for a professional print finish

You can forget outsourcing to professional printers when you've got this workhorse printer inhouse. Print professional-looking booklets and magazines with our booklet finisher feature. Choose from punch or staple finishes or opt for staple-free binding with our hybrid finisher. The multi-folding unit takes the manual work out of folding leaflets and, with a choice of paper options and additional paper capacity, you won't need to refill the paper trays as often.



RICOH IM 2500 / IM 3000 / IM 3500 / IM 4000 / IM 5000 / IM 6000

MAIN SPECIFICATIONS

| MODEL | RICOH IM 2500 | RICOH IM 3000 | RICOH IM 3500 | RICOH IM 4000 | RICOH IM 5000 | RICOH IM 6000 |
|------------------------------|--|---------------|---------------|---------------|---------------|---------------|
| GENERAL | | | | | | |
| Warm-up time | 18 seconds | 17.7 seconds | 18.6 seconds | 17.9 seconds | 19.1 seconds | 18.8 seconds |
| First output speed: B/W | 4.1 seconds | 3.9 seconds | 3.8 seconds | 3.6 seconds | 2.7 seconds | 2.3 seconds |
| Continuous output speed | 25 ppm | 30 ppm | 35 ppm | 40 ppm | 50 ppm | 60 ppm |
| Memory: standard | 2 GB | | | | | |
| HDD: maximum | 320 GB | | | | | |
| ARDF capacity | 100 sheets | | | | | |
| SPDF capacity | 220 sheets | | | | | |
| Weight | with ARDF: 71 kg with SPDF: 76.5 kg | | | | | |
| Dimensions (W x D x H) | with ARDF: 587 x 673 x 913 mm with SPDF: 587 x 673 x 963 mm | | | | | |
| Power source | 220 - 240 V, 50 - 60 Hz | | | | | |
| COPIER | | | | | | |
| Multiple copying | Up to 999 copies | | | | | |
| Resolution | 600 dpi | | | | | |
| Zoom | From 25% to 400% in 1% steps | | | | | |
| PRINTER | | | | | | |
| CPU | Intel® Atom Processor ApolloLake-I 1.36 GHz | | | | | |
| Printer language: standard | PCL5c, PCL6, PostScript 3 (emulation), PDF direct (emulation) | | | | | |
| Printer language: option | Genuine Adobe® PostScript®3™, IPDS, PDF Direct from Adobe® | | | | | |
| Print resolution: maximum | Up to 1,200 x 1,200 dpi | | | | | |
| Network interface: standard | Ethernet 10 base-T/100 base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B | | | | | |
| Network interface: option | Bi-directional IEEE 1284, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) | | | | | |
| Mobile printing capability | Apple AirPrint®, Mopria®, NFC, RICOH Smart Device Connector | | | | | |
| Windows® environments | Windows® 8.1, Windows® 10, Windows® Server 2012, Windows® Server 2012R2, Windows® Server 2016, Windows® Server 2019 | | | | | |
| Mac OS environments | Macintosh OS X v10.13 or later | | | | | |
| UNIX environments | UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux, IBM® AIX, Citrix XenApp (7.6 LTSR, 7.15 LTSR, VirtualApps/Desktops 71912 LTSR and later) | | | | | |
| SAP® environments | SAP® R/3®, SAP® S/4® | | | | | |
| Other supported environments | NDPS Gateway AS/400® using OS/400 Host Print Transform | | | | | |
| SCANNER | | | | | | |
| Scanning speed: ARDF | 80 ipm (200/300 dpi) | | | | | |
| Scanning speed: SPDF | Simplex: 120 ipm (200 dpi), 110 ipm (300 dpi) Duplex: 240 ipm (200 dpi), 180 ipm (300 dpi) | | | | | |
| Resolution: maximum | Up to 600 dpi | | | | | |
| File formats | Single Page TIFF (Compression on, Compression off), Single page JPEG, Single page PDF, Single page High compression PDF, Single page PDF/A, Multi page TIFF, Multi page PDF, Multi page High compression PDF, Multi page PDF/A | | | | | |
| Scan modes | E-mail, USB, SD Card, URL, FTP, SMB | | | | | |
| FACSIMILE | | | | | | |
| Circuit | PSTN, PBX | | | | | |
| Transmission speed | 2 seconds | | | | | |
| Modem speed: maximum | 33.6 Kbps | | | | | |
| Resolution: standard | 8 x 3.85 line/mm, 200 x 100 dpi 8 x 7.7 line/mm, 200 x 200 dpi | | | | | |
| Resolution: option | 16 x 15.4 line/mm, 400 x 400 dpi | | | | | |
| Compression method | MH, MR, MMR, JBIG | | | | | |
| Memory: standard | 4 MB (320 pages) | | | | | |
| Memory: maximum | 60 MB (4,800 pages) | | | | | |
| PAPER HANDLING | | | | | | |
| Recommended paper size | Tray 1: A3, A4, A5, A6, B4, B5, B6, Envelopes Tray 2: A3, A4, A5, A6, B4, B5, B6, Envelopes Bypass tray: A3, A4, A5, A6, B4, B5, B6, Envelopes, Custom Size paper | | | | | |
| Paper input: standard | 1,200 sheets | | | | | |
| Paper input: maximum | 4,700 sheets | | | | | |
| Paper output: standard | 500 sheets | | | | | |

| MODEL | RICOH IM 2500 | RICOH IM 3000 | RICOH IM 3500 | RICOH IM 4000 | RICOH IM 5000 | RICOH IM 6000 |
|---|---|---------------|---------------|---------------|---------------|---------------|
| Paper output: maximum | 1,625 sheets | | | 3,625 sheets | | |
| Paper weight | Trays: 60 - 300 g/m ² , Bypass: 52 - 300 g/m ² , Duplex: 52 - 256 g/m ² | | | | | |
| Paper types | Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Envelope, Label paper, OHP | | | | | |
| ECOLOGY | | | | | | |
| Power consumption: maximum | 1,600W | | | 1,780W | | |
| Power consumption: operation | 446W | 475W | 553W | 568W | 767W | 821W |
| Power consumption: ready | 56.4W | | | 64.7W | | |
| Power consumption: sleep | 0.57W | | | | | |
| TEC* | 0.29 kWh/week | 0.35 kWh/week | 0.41 kWh/week | 0.47 kWh/week | 0.63 kWh/week | 0.74 kWh/week |
| <i>*It is a reference value based on the ENERGY STAR Ver.3.0 test method.</i> | | | | | | |
| INPUT / OUTPUT TRAY AND FINISHER OPTIONS | | | | | | |
| 1x 550-sheet Paper tray (PB3270) | Paper size: A3, A4, A5, A6, B4, B5, B6, Paper weight: 60-300 g/m ² | | | | | |
| 2x 550-sheet Paper tray (PB3300) | Paper size: A3, A4, A5, A6, B4, B5, B6, Paper weight: 60-300 g/m ² | | | | | |
| 2,000-sheet Large capacity tray (LCIT PB3290) | Paper size: A4, 8.5"x11", Paper weight: 60-300 g/m ² | | | | | |
| 1,500-sheet Side large capacity tray (LCIT RT3040) | Paper size: A4, B5, Paper weight: 60-300 g/m ² | | | | | |
| 1,000-sheet Hybrid finisher (SR3260) | Paper size: A3, A4, A5, A6, B4, B5, B6, Paper weight: 52-300 g/m ² , Stack capacity: 1,000 sheets, Staple capacity: 50 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 52-105 g/m ² , Staple positions: Top, Bottom, 2 staples | | | | | |
| 3,000-sheet Finisher (SR3280) | Paper size: A3, A4, A5, A6, B3, B4, B5, B6, Paper weight: 52-300 g/m ² , Stack capacity: 3,000 sheets, Staple capacity: 50 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 52-105 g/m ² , Staple positions: Top, Bottom, 2 staples, Top Slant | | | | | |
| 1,000-sheet Booklet finisher (SR3270) | Paper size: A3, A4, A5, A6, B4, B5, B6, Paper weight: 52-300 g/m ² , Stack capacity: 1,000 sheets, Staple capacity: 50 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 52-105 g/m ² , Staple positions: Top, Bottom, 2 staples, Booklet | | | | | |
| 2,000-sheet Booklet finisher (SR3290) | Paper size: A3, A4, A5, A6, B3, B4, B5, B6, Paper weight: 52-300 g/m ² , Stack capacity: 2,000 sheets, Staple capacity: 50 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 52-105 g/m ² , Staple positions: Top, Bottom, 2 staples, Booklet | | | | | |
| 250-sheet Internal finisher (SR3300) | Paper size: A3, A4, A5, A6, B4, B5, Paper weight: 52-300 g/m ² , Stack capacity: 250 sheets, Staple capacity: 5 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 64-80 g/m ² , Staple positions: Top | | | | | |
| 500-sheet Internal finisher (SR3250) | Paper size: A3, A4, A5, A6, B4, B5, Paper weight: 52-300 g/m ² , Stack capacity: 500 sheets, Staple capacity: 50 sheets, Staple paper size: A3, A4, B4, B5, Staple paper weight: 52-105 g/m ² , Staple positions: Top, Bottom, 2 staples | | | | | |
| Internal shift tray (SH3080) | Tray capacity: 250 sheets (A4/Letter), Paper size: SRA3, A3, A4, A5, A6, B4, B5, B6, Paper weight: 52-300 g/m ² | | | | | |
| One-bin tray (BN3130) | Tray capacity: 125 sheets, Paper size: A3, A4, A5, B3, B4, Paper weight: 52-300 g/m ² | | | | | |
| OTHER OPTIONS | | | | | | |
| PostScript3 Unit Type M45, IPDS Unit Type M45, XPS Direct Print Option Type M45, Fax Option Type M45, G3 Interface Unit Type M45, Fax Connection Unit Type M45, NFC Card Reader Type M45, Smart Card Reader Built-in Unit Type M45, Platen Cover PN2000, Marker Type 30, Small Paper Feeding Unit Type M37, Page Keeper Type M37, Caster Table Type M3, Side Tray Type M37, Bridge Unit BU3090, Punch Unit PU3080 NA, Punch Unit PU3080 EU, Punch Unit PU3080 SC, Punch Unit PU3070 NA, Punch Unit PU3070 EU, Punch Unit PU3070 SC, Internal Multi-Fold Unit FD3010, ADF Handle TypeC, Device Server Option Type M37, Unicode Font Package for SAP® 1 License, Unicode Font Package for SAP® 10 License, IEEE 802.11a/g/n Interface Unit Type M19, IEEE 1284 Interface Board Type M19, File Format Converter Type M19, FAX Memory Unit Type M19 64MB, OCR Unit Type M13, Optional Counter Interface Unit Type M12, Key Counter Bracket Type M3, External Keyboard Bracket Type M19, DataOverwriteSecurity Unit Type M19, Punch Unit PU3090 NA, Punch Unit PU3090 EU, Punch Unit PU3090 SC | | | | | | |

RICOH
imagine. change.

www.ricoh-ap.com

RICOH ASIA PACIFIC PTE LTD

30 Cecil Street, #13-01/08 Prudential Tower, Singapore 049712 Phone: +65 6830 5888, Fax: +65 6830 5830

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2021 Ricoh Asia Pacific Pte Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Asia Pacific Pte Ltd.

